

# ShrinkMark Heat Shrink Sleeves

*Dot-Matrix and Thermal Transfer*



ShrinkMark is a durable, flame-retardant, heat-shrinkable marking sleeve that is ideal for tough industrial environments, including switchgear, motor control centers, and terminal boxes. They shrink faster than conventional thermoplastic tags and offer a 3:1 shrink ratio.

profile with no edges to snag. The crosslinked polyolefin construction makes ShrinkMark sleeves resistant to abrasion, aggressive cleaning solvents, and industrial fluids.


Because ShrinkMark sleeves are extruded from tubes, they have a low installed

UL recognized to Standard 224 (file E35586) and CSA certified to C22.2 No. 198.1. Temperature range is -30°C to 105°C.

164 Selection information (dimensions in inches/millimeters)

Wire Size	Nominal Diameter	Recovered Diameter	Product Order Code Replace - 9 with - 4 if Yellow is needed	Markers/box
#22 - #18	0.125 (3)	0.042 (1)	ShrinkMark-18-2.00-9	250
#22 - #18	0.125 (3)	0.042 (1)	ShrinkMark-18-2.00-S1-9	500
#22 - #18	0.125 (3)	0.042 (1)	ShrinkMark-18-2.00-S2-9	750
#22 - #18	0.125 (3)	0.042 (1)	ShrinkMark-18-2.00-S3-9	1000
#18 - #12	0.187 (5)	0.062 (2)	ShrinkMark-12-2.00-9	250
#18 - #12	0.187 (5)	0.062 (2)	ShrinkMark-12-2.00-S1-9	500
#18 - #12	0.187 (5)	0.062 (2)	ShrinkMark-12-2.00-S2-9	750
#18 - #12	0.187 (5)	0.062 (2)	ShrinkMark-12-2.00-S3-9	1000
#16 - #10	0.250 (6)	0.083 (2)	ShrinkMark-10-2.00-9	250
#16 - #10	0.250 (6)	0.083 (2)	ShrinkMark-10-2.00-S1-9	500
#16 - #10	0.250 (6)	0.083 (2)	ShrinkMark-10-2.00-S2-9	750
#16 - #10	0.250 (6)	0.083 (2)	ShrinkMark-10-2.00-S3-9	1000
#10 - #2	0.500 (13)	0.167 (4)	ShrinkMark-2-2.00-9	250
#10 - #2	0.500 (13)	0.167 (4)	ShrinkMark-2-2.00-S1-9	500
#10 - #2	0.500 (13)	0.167 (4)	ShrinkMark-2-2.00-S2-9	750
#10 - #2	0.500 (13)	0.167 (4)	ShrinkMark-2-2.00-S3-9	1000
#1 - 250	1.00 (25)	0.333 (9)	ShrinkMark-250-2.00-9	250
#1 - 250	1.00 (25)	0.333 (9)	ShrinkMark-250-2.00-S1-9	500
#1 - 250	1.00 (25)	0.333 (9)	ShrinkMark-250-2.00-S2-9	750
#1 - 250	1.00 (25)	0.333 (9)	ShrinkMark-250-2.00-S3-9	1000
350 - 1000	1.40 (36)	0.740 (19)	ShrinkMark-1000-2.00-9	250
350 - 1000	1.40 (36)	0.740 (19)	ShrinkMark-1000-2.00-S1-9	500
350 - 1000	1.40 (36)	0.740 (19)	ShrinkMark-1000-2.00-S2-9	750
350 - 1000	1.40 (36)	0.740 (19)	ShrinkMark-1000-2.00-S3-9	1000

Part Number Example: ShrinkMark 10 - 2.00 - S2 - 9 (1K)

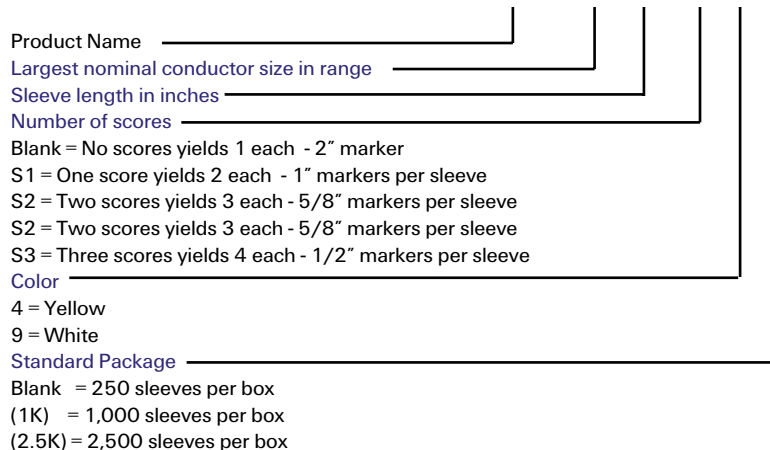

**Ordering Information**

1. Select the appropriate catalog number. Selections are based on typical dimensions for low-voltage insulated cable. Confirm selection with cable dimension to assure proper sizing.
2. Standard length is 2 inches for ShrinkMark sleeves.
3. Standard colors for sleeves are white (-9) and yellow (-4).
4. Sleeves are available pre-cut scored - S1, -S2, or -S3 (for one, two, or three scores, respectively).
5. Check with your Tyco Electronics representative for delivery information.



UL recognized to Standard 224



Certified C22.2 No. 198.1